Datron GmbH
German quality Italian Design

OWNER'S MANUAL

Humidor je určen výhradně pro skladování doutníků.




This Instruction Manual is the universal-purpose version for the models of wine cabinet manufactured by our Co. The appearance of the units that you purchase might be slightly different from the Manual, but it does not affect your proper operations and usage. Please read carefully the sections corresponding to the specific model you choolse, and keep the manual properly so as to facilitate your reference at later time.

Contents

1- Structure----------2
2- Important safety instruction---------- 3
3- Installation and use---------- 3
4- Usage---------- 4
5- Installation of handle---------- 6
6- Maintenance---------- 6
7- Trouble shooting---------- 7

1. Structure

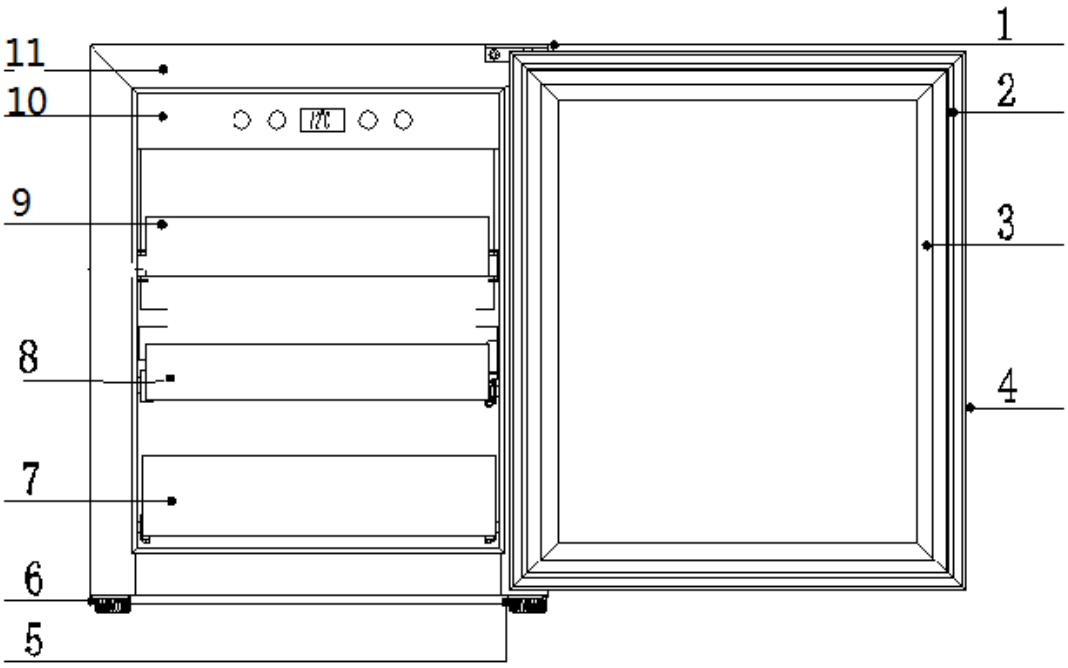

(1) Up Hinge Cover

(2) Door Sealing

(3) Door Frame

(4) Door Handle

(5) Down Hinge

(6) Foot

(7) Down cigar drawer

(8) Middle drawer

(9) Up cigar drawer

(10) Control Panel

(11) Body

Noted: This Instruction Manual is the universal-purpose version for the models of wine cabinet manufactured by our Co. The appearance of the units that you purchase might be slightly different from the Manual, but it does not affect your proper operations and usage.

2. Important safety instruction

Please read carefully the sections corresponding to the specific model you choose, and keep the manual properly so as to facilitate your reference at later time.

(1) This product can be used in chateau, bar, store, restaurant, hotel, household, enterprise and so on.
(2) This product is only suitable for storing cigars. If the products are used for other uses or malfeasance use and lead to other risk, the manufacturer is not liable.
(3) Don't store or near flammable and combustible products.
(4) This product only suitable for ST climate (0-38℃)， otherwise, the product can't be applied normally.

(5) This product can't be used in higher than 1500 meters above sea level, otherwise, the glass door may burst and damage to the person.

(6) Do not use an extension cord and don't share a same socket with other machine. Otherwise, it is easy to cause short circuit or damage the electronic components. When pull out the cord, you must hold the plug, don't only take the live wire.

(7) Do not place this product into other machine.

(8) The ground wire is not connecting to the gas pipe, water pipe, lightning conductor, the phone of grounding wires; otherwise, it might be at risk.

(9) Do not install to the place which may leak corrosive or have flammable gas. It is easy to explode or damage to the machine.

(10) This machine can't be used by Children and the person who are lacking of experience. Do not allow children to climb on， sit on or stand on the wine cabinet

3. Installation and use

(1) When you receive the cabinet, make sure when you unpack it there are no flaws in its external appearance (from shocks, deformation, etc.)

(2) Open the door and check all interior fittings and supplied items whether are complete or not (shelves, instruction, control panel, etc.).

(3) After checking, if no problem, please take the next step operation:

Put the machine in your specified place. Please keep 5 cm distances with the wall (left & right and the back.) What's more, please ensure that the ground is level.

(4) Away from sources of heat and high humidity areas (laundry room and bathroom, etc).


(5) Do not tilt it at an angle of more than 45° when move the cabinet. If the cigar cooler was lied or upside down during the delivery, you must stand the wine cooler and use after 2 hours.

(6) Making sure the ventilation is free if you wish to install your cabinet into a worktable; otherwise, it will reduce the effect of usage.

(7) Please check the plug and cable before you connect the power, then, make sure correct voltage of 220V-240V/50Hz.

4. Usage

4.1 Temperature Setting

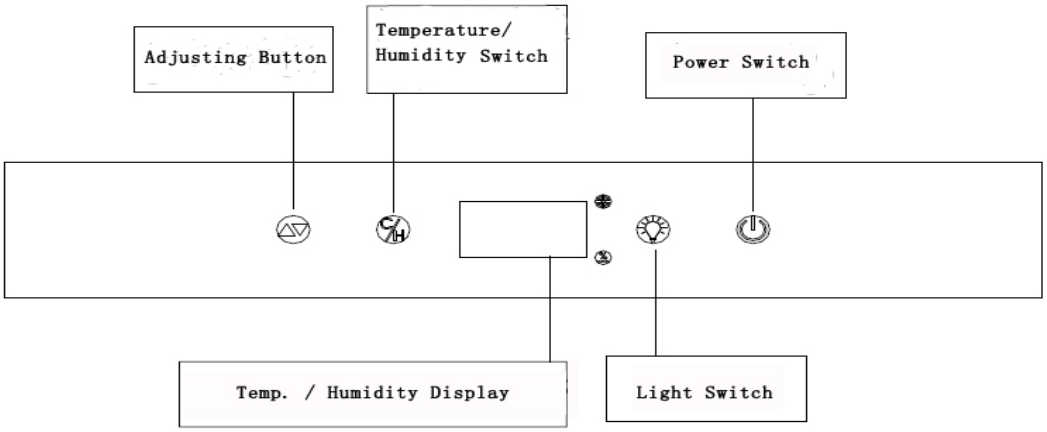

Temperature setting:
Temperature setting range: 12℃~22℃, press the adjusted button can set the temperature. Each time you press, the temperature will increase 1℃.
Noted: If you don't set for 5 seconds or you have settled after 5 seconds, the system will restore to its original state automatically or the after setting state.

4.2 Humidity Setting

Humidity setting range: 50%~75%, when you press "Temp./Humidity Switch", it will display the current humidity, when you press the "adjusted button", it can set the humidity. Each time you press, the humidity will increase 1%.

Noted: In order to control the humidity effectively, you need to pour the water into the stainless steel plate. However, the water-injection rate can't exceed the two-thirds of the total.

4.3 Setting of power and light

Touch the “Power Switch” and “Light Switch” can control the power or light on-off.

4.4 Control Panel

ON/OFF of the whole system.


ON/OFF of inside Cabinet LED light

Temperature/Humidity Switch

Adjusting Button

4.5 Fill the Water Tank


The humidity needed to preserve cigars is produced also with the water tank located inside the cave at the bottom. Thanks to interior ventilation, humidity is uniform throughout the cellar. To do this you simply fill the water tank regularly with distilled or demineralized water to prevent the spread and proliferation of bacteria on your tobacco. Remove the middle drawer and fill the tank with water to about two thirds. Depending on your use and the setting temperature, it should be enough for about 3 weeks. To be renewed when necessary.

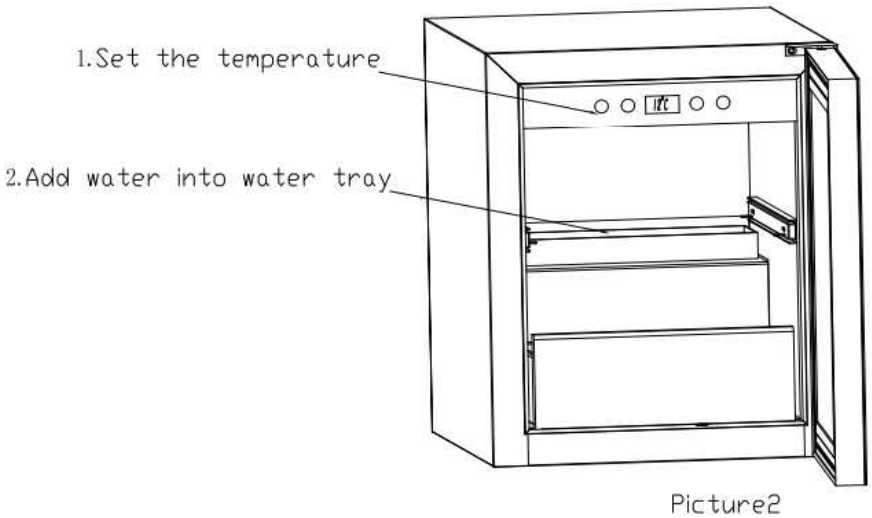

Picture2

5. Installation of handle

Install the handle according to the following four steps:

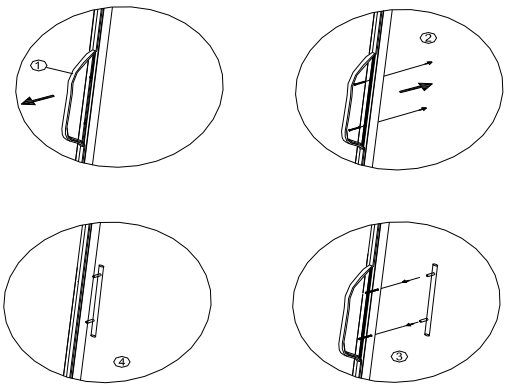

1. Move door seal out in the place of installing the handle
2. Take screws from Manual Bag & Put it in the appointed place
3. Fasten door handle by screwdriver
4. Refit the door seal to the relevant position

6. Maintenance

In order to ensure best performance & long-last reliable working item, please follow the simple maintenance and cleaning operations as below:

1. Do not open the door frequently during using. Try to reduce the time of opening the door in order to avoid the cold air leakage and save electricity.

2. When you take the cigar, please try to remove the above first from each zone.

3. After placing the cigar, when you set the temperature, please try to set the temperature to upper limit on the premise of meeting the storing cigars.

4. Do not put your fingers or a stick into the fan; otherwise, it might be danger of injury.

5. Do not touch the compressor; otherwise, there is a risk of burns.

6. Do not put the item on the door; otherwise the cooler will dump
7. It is normal that the heat of the back of cigar cooler and casing .Because the condenser at the back of cigar cooler.

8. Please note that the cooler doesn't use for a long time:

- All the items in cooler need to be taken out and unplug the power plug.

-Please clean the inside and outside of the cooler and make it fully dry

-Away from the children's play area, in case of the children enter the cooler.

9. The plastic parts is easy to aging crack if the cooking oil stick on the door sealing, door frame for a long time. Therefore, please clean the coolers regularly.

10. Don't damage the refrigeration cycle pipe. The refrigeration cycle pipe was installed inside and outside cabinet. If these parts are broken, it will cause the cooling pipeline rupture.

11. Clean the cooler internal and external surface and the inner casing.

-Please use the dryness soft-cotton fabric to wipe. Or brush with the essence and use the damp cloth to wipe. Don't water it directly.

- Please clean and maintenance the cooler regularly.

7. Trouble Shooting

Problem	Solution
no working	Plug or not
	Fuse break
	No power
Cooling problem	Heat source near the item
	Ventilation not well
	Door close not well or door open too long
	Door sealing problem or deformation
	Bottles loading too much in same shelf
	Air inlet or outlet block
	Control Setting problem
	Ventilation space in the right & left casing not enough
Noisy	Wine cabinet placed not flat
	Item touch the wall
	Some parts loose or taken off

If still have problem after checking above, please try to contact service center or dealer.

Noted: normal operation for following phenomenon:

A) Compressor not start:

Compressor will not start if room temperature is lower than desired temperature, but item is still working with heater inside till desired temperature achieved**.**

B) Compressor re-starts

Compressor will stop working when cooling system in the cabinet reaches presetting temperature, and re-start working until the desired temperature is achieved. Allow a minimum 5 minute interval before re-starting.

C) Dew on the surface of cabinet：

The surface of wine cabinet especially the glass door appears some frost if item in a damp room. This is due to the moisture in the air coming into contact with the cabinet. Please wipe it away with dry cloth.

D) Liquid sound：

（1）、The sound of compressor when starts or stops working

（2）、The flowing sound of refrigerant in the refrigeration system

（3）、The evaporating sound of refrigerant in the evaporator

E) Condensation formed at the top of glass window

In hot weather or high humidity season, the cigar cooler will form condensation at the top of glass window. This is caused by high humidity. It has no effect on safety performance. That's normal.

Warning:

Refrigerant and foaming material is flammable. Please take care when Maintenance, Installation, Handling and processing. Please contact with specialized department for wasted products, and do not discard freely.